




# Fixed Mount Solutions for Skin Temperature Screening

Easy to Integrate and Operate

Hospitals, industries, and large facilities need a reliable skin temperature screening solution to help them reopen while protecting the safety of employees, customers, and visitors. FLIR fixed-mount thermal cameras can integrate with existing networks for point-of-entry screening that can be performed in seconds, identifying individuals with an elevated skin temperature and allowing operators to make instant decisions on whether to direct the individual for secondary screening.

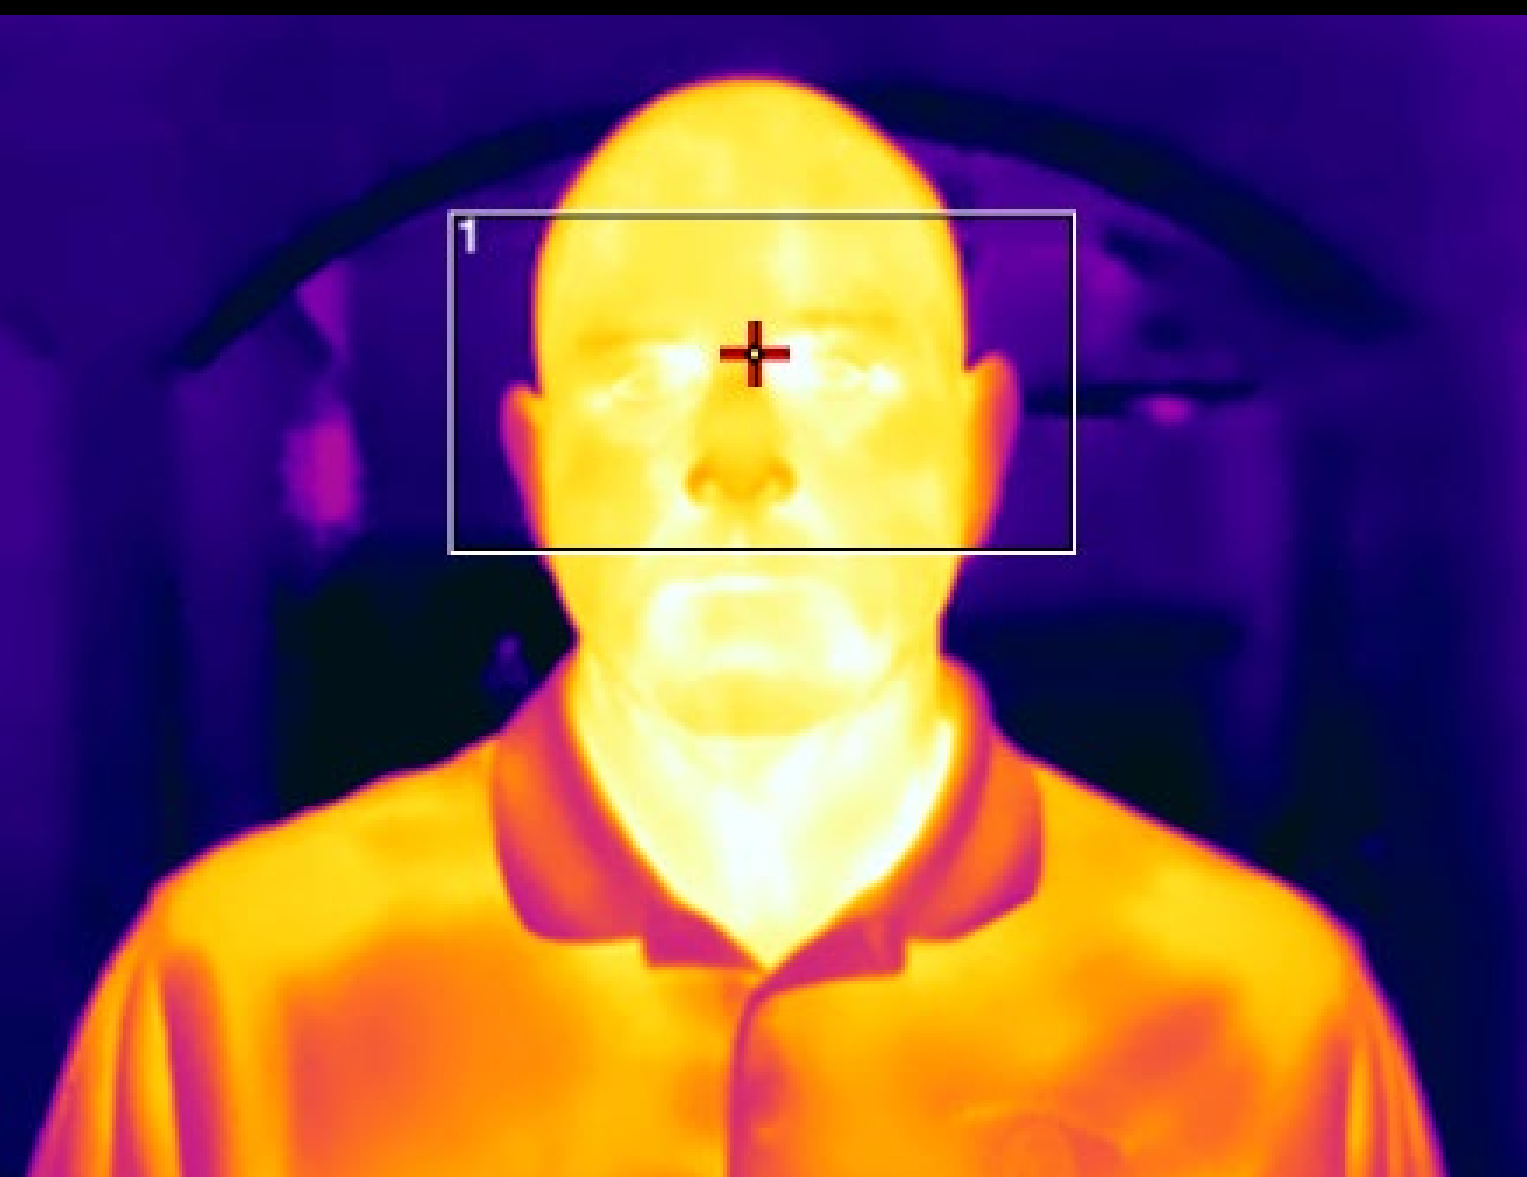

## Fast, accurate, and easy to use

- Built-in Screen-EST Mode has visible/audible alarms for rapid decision-making
- Ambient drift compensation ensures accurate measurement regardless of environmental conditions
- Works with FLIR Screen-EST Desktop\* software for full-featured, automatic screening


\* Model dependent



Add to existing networks, VMS, or access control systems thanks to industry standards, including ONVIF compliance\*



Minimize cables with Power over Ethernet or Wi-Fi connectivity

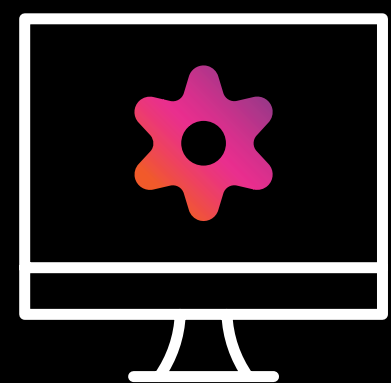

Install for permanent use or create a mobile screening station using the integrated tripod mount

## MAINTAINS SAFETY & PRIVACY

FLIR skin temperature screening solutions are non-contact, safe, and private. Thermal imagery displays heat—not identifying facial features—and FLIR thermal screening software does not require the capture, recording, or transmitting of personally identifiable information.

[LEARN MORE](#)

# Fixed Mount Solutions for Skin Temperature Screening



	A500-EST	A700-EST
Infrared resolution	464 x 348 pixels	640 x 480 pixels
Thermal resolution/NETD	<40 Mk @ 30°C (86°F)	
Lens	24° (17 mm) or 42° (10 mm)	
Field of view	24° x 18° or 42° x 32°	
Focus	One-shot contrast, motorized, manual	
Frame rate	30 Hz	
Focal plane array /spectral range	Uncooled microbolometer/7.5–14 μm	
Detector pitch	17 μm	12 μm
Screening accuracy (drift)	±0.3°C (±0.5°F)	
Object temperature range	15°C to 45°C (59°F to 113°F)	
Digital data streaming	Multiple image streams. Bit rate set through camera web	
Command and control	RTSP, Wi-Fi	
Ethernet connector type and standard	M12 8-pin X-coded, Female; 1000 Mbps, IEEE 802.3	
Ethernet power	Power over Ethernet, PoE IEEE 802.3af class 3	
Ethernet protocols	Modbus TCP Master, Modbus TCP Slave, EthernetIP, MQTT, SNMP, TCP, UDP, SNTP, RTSP, RTP, HTTP, ICMP, IGMP, sftp (server), FTP (client) SMTP, DHCP, MDNS (Bonjour), uPnP	
Connector type and standard	Female RP-SMA; IEEE802.11a/b/g/n	
Connections	Peer to peer (ad hoc) or infrastructure (network)	
Power	PoE or External	
External voltage	Allowed range = 18-56 VDC, 8 W max	
Size (L x W x H)	123 x 77 x 77 mm (4.84 x 3.03 x 3.03 in)	
Weight	0.82 kg (1.8 lb)	
Mounting	Base mounting: 4x M4 on 4 sides. Tripod mounting: UNC ¼"-20 on 2 sides	

**CORPORATE HEADQUARTERS**  
FLIR Systems, Inc.  
27700 SW Parkway Ave.  
Wilsonville, OR 97070  
USA  
PH: +1 866.477.3687

**NASHUA**  
FLIR Systems, Inc.  
9 Townsend West  
Nashua, NH 03063  
USA  
PH: +1 866.477.3687

**LATIN AMERICA**  
FLIR Systems Brasil  
Av. Antonio Bardella, 320  
Sorocaba, SP 18085-852  
Brasil  
PH: +55 15 3238 8070

**CANADA**  
FLIR Systems, Ltd.  
3430 South Service Road,  
Suite 103  
Burlington, ON L7N 3J5  
Canada  
PH: +1 800.613.0507

**EUROPE**  
FLIR Commercial Systems  
Luxemburgstraat 2  
2321 Meer Belgium  
PH: +32 (0) 3665 5100

**ASIA**  
FLIR Systems Co. Ltd.  
Room 1613 – 16, Tower 2  
Grand Central Plaza,  
No. 138 Shatin Rural  
Committee Road  
Shatin, New Territories  
Hong Kong  
PH: +852 2792 8955

Neither FLIR Screen-EST Mode nor Desktop require the capture, recording, or transmitting of personally identifiable information. The thermal imagery displays heat, not identifying facial features.

Contagions such as COVID-19, SARS, and other diseases can produce symptoms like elevated skin temperature—a possible sign of infection. While thermal cameras are not capable of detecting or diagnosing viruses, FLIR skin temperature screening solutions comply with governing standards, including ISO, IEC, and US FDA. Thermal screening represents a simple, preliminary measure for mitigating further contagion and possible rebound, providing the confidence to return to normalcy.

20-0714-EST Fixed\_Mount\_leave\_behind

